

**2SA1963**

## High-Frequency Low-Noise Amplifier, Ultrahigh-Speed Switching Applications


### Features

- Low noise :  $NF=1.5\text{dB}$  typ ( $f=1\text{GHz}$ ).
- High gain :  $|S_{21e}|^2=9\text{dB}$  typ ( $f=1\text{GHz}$ ).
- High cutoff frequency :  $f_T=5\text{GHz}$  typ.

### Package Dimensions

unit:mm

2018B

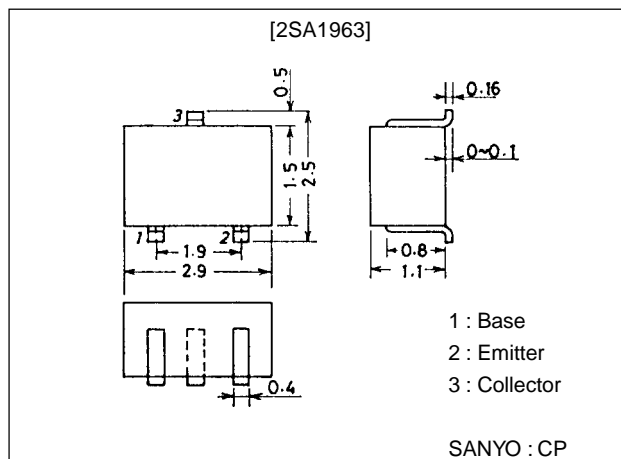

### Specifications

#### Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Collector-to-Base Voltage	$V_{CB0}$		-12	V
Collector-to-Emitter Voltage	$V_{CEO}$		-8	V
Emitter-to-Base Voltage	$V_{EBO}$		-2	V
Collector Current	$I_C$		-50	mA
Collector Dissipation	$P_C$		200	mW
Junction Temperature	$T_J$		150	$^\circ\text{C}$
Storage Temperature	$T_{stg}$		-55 to +150	$^\circ\text{C}$

#### Electrical Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Collector Cutoff Current	$I_{CBO}$	$V_{CB}=-10\text{V}, I_E=0$			-1.0	$\mu\text{A}$
Emitter Cutoff Current	$I_{EBO}$	$V_{EB}=-1\text{V}, I_C=0$			-1.0	$\mu\text{A}$
DC Current Gain	$h_{FE}$	$V_{CE}=-5\text{V}, I_C=-10\text{mA}$	20*		120*	
Gain-Bandwidth Product	$f_T$	$V_{CE}=-5\text{V}, I_C=-10\text{mA}$	3	5		GHz
Output Capacitance	$C_{ob}$	$V_{CB}=-10\text{V}, f=1\text{MHz}$		0.8	1.3	pF
Reverse Transfer Capacitance	$C_{re}$	$V_{CB}=-10\text{V}, f=1\text{MHz}$		0.55		pF
Forward Transfer Gain	$ S_{21e} ^2(1)$	$V_{CE}=-5\text{V}, I_C=-10\text{mA}, f=1\text{GHz}$	7	9		dB
	$ S_{21e} ^2(2)$	$V_{CE}=-2\text{V}, I_C=-3\text{mA}, f=1\text{GHz}$		6.5		dB
Noise Figure	NF	$V_{CE}=-5\text{V}, I_C=-5\text{mA}, f=1\text{GHz}$		1.5	3.0	dB

\* : The 2SA1963 is classified by 10mA  $h_{FE}$  as follows :

20	1	50	40	2	80	60	3	120
----	---	----	----	---	----	----	---	-----

Marking : MS

 $h_{FE}$  ranks : 1, 2, 3









■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

**SANYO Electric Co., Ltd. Semiconductor Business Headquarters**


TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

# 2SA1963

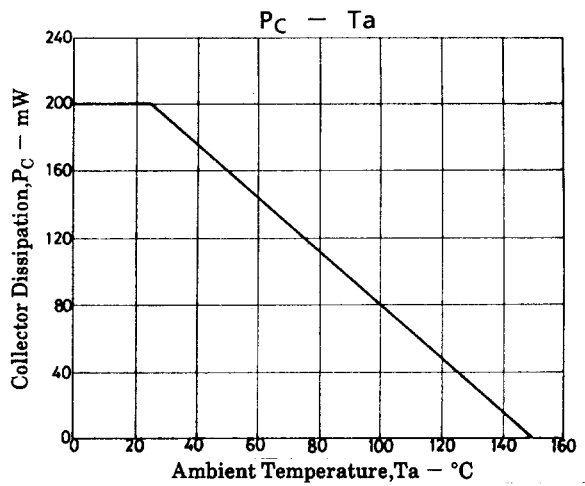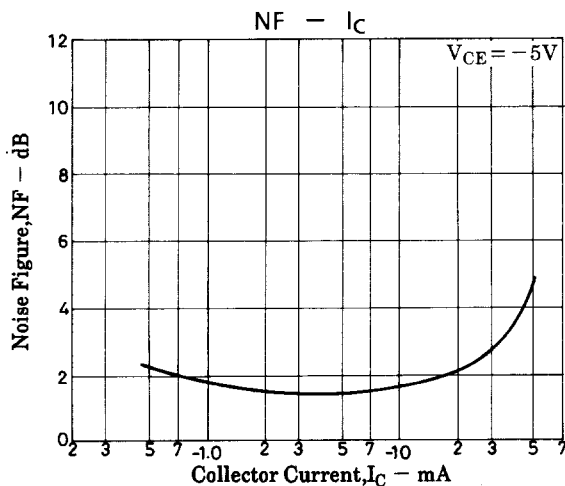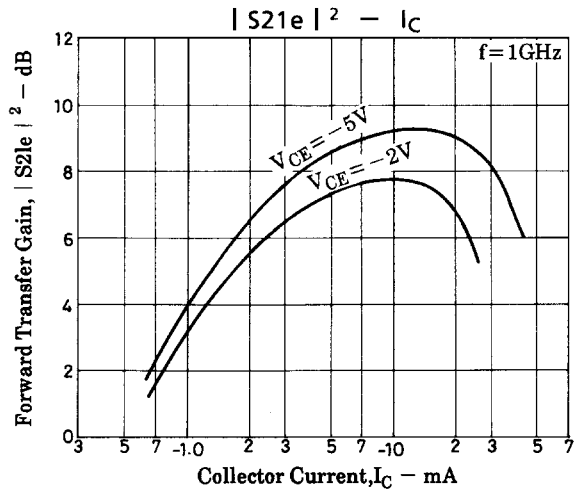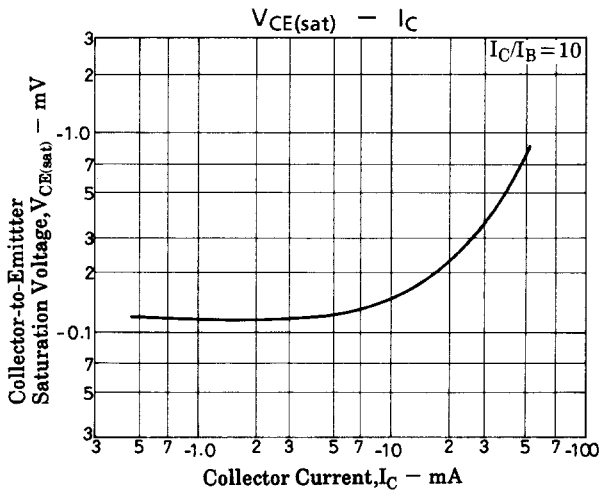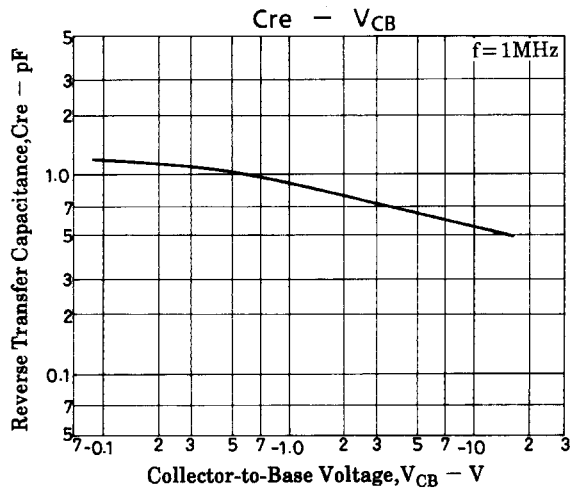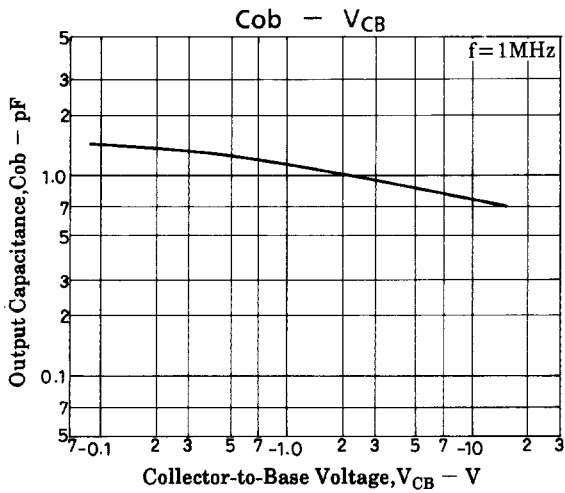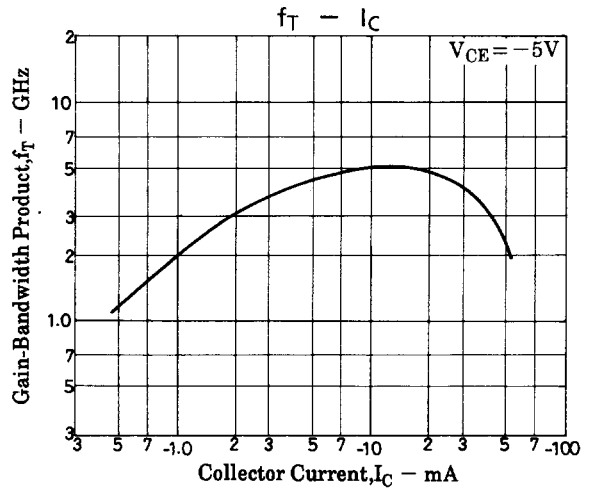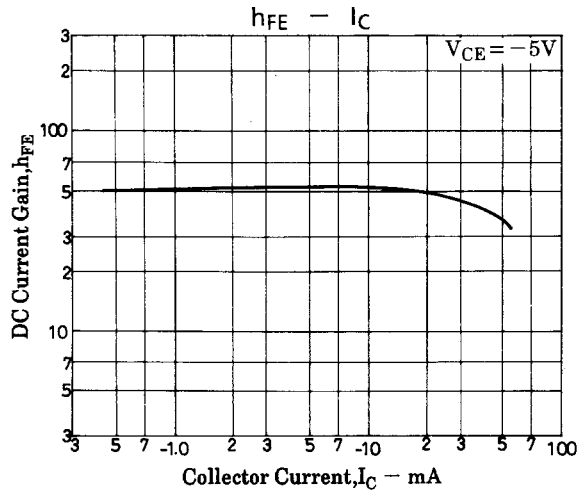


# 2SA1963


S11e :  $f = 100\text{MHz}$ , 200 to 2000MHz (200MHz step)

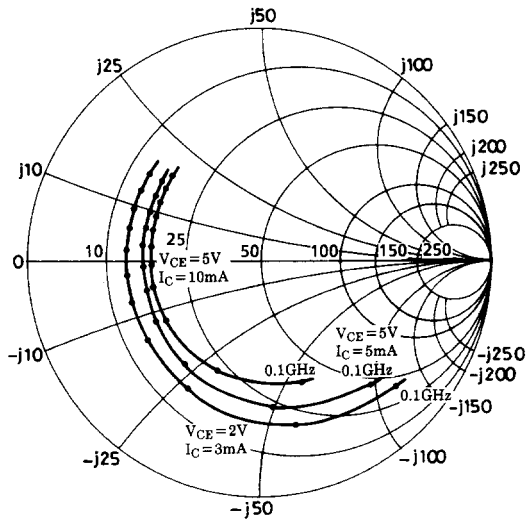


S21e :  $f = 100\text{MHz}$ , 200 to 2000MHz (200MHz step)

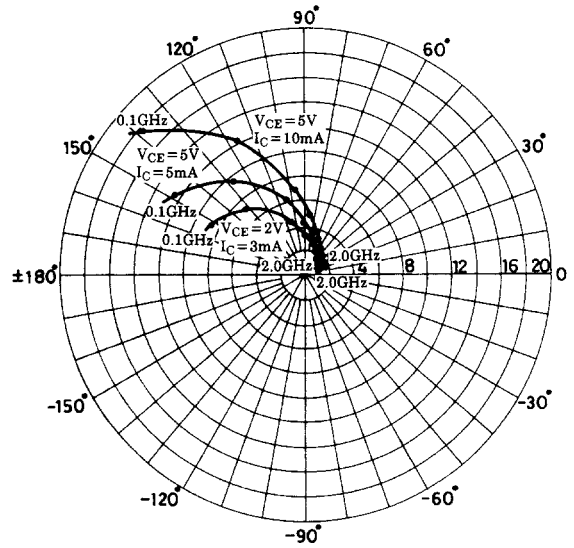

S12e :  $f = 100\text{MHz}$ , 200 to 2000MHz (200MHz step)

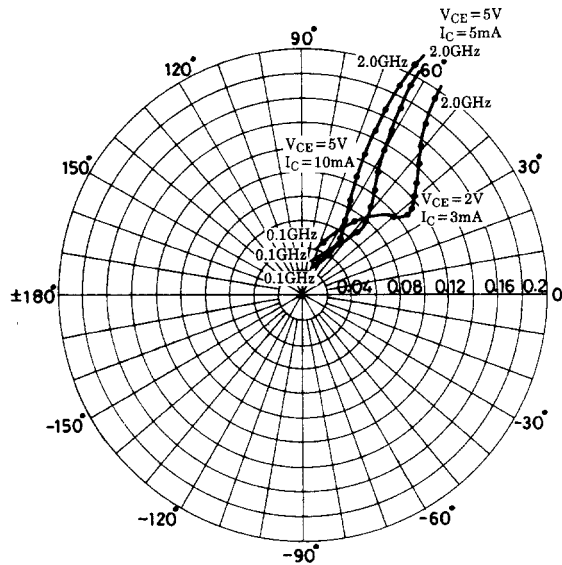

S22e :  $f = 100\text{MHz}$ , 200 to 2000MHz (200MHz step)

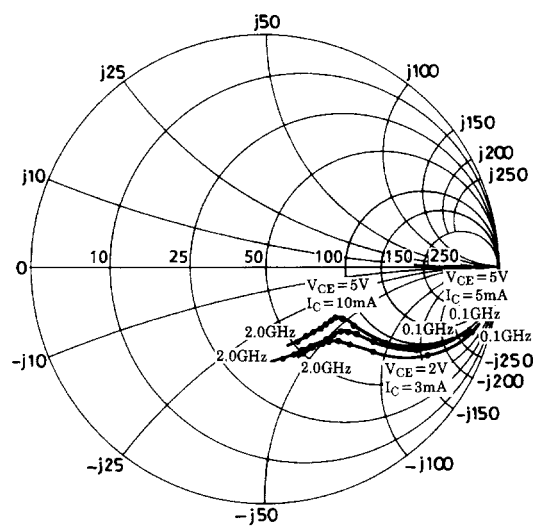

## 2SA1963

### S Parameters (Common Emitter)

$V_{CE}=5V, I_C=5mA, Z_0=50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.711	-47.7	12.330	149.2	0.033	68.0	0.893	-18.2
200	0.628	-83.9	9.680	127.8	0.052	55.1	0.740	-28.5
400	0.542	-126.7	6.113	104.1	0.069	47.5	0.559	-34.7
600	0.513	-150.7	4.337	90.6	0.080	48.5	0.479	-36.5
800	0.502	-166.1	3.375	80.7	0.091	52.0	0.442	-38.4
1000	0.504	-177.9	2.772	72.7	0.104	55.0	0.424	-41.5
1200	0.506	172.3	2.378	65.5	0.119	57.6	0.416	-45.2
1400	0.509	163.8	2.069	58.5	0.136	59.6	0.409	-49.6
1600	0.516	155.3	1.825	52.1	0.153	61.1	0.403	-55.0
1800	0.527	147.7	1.645	46.4	0.173	61.9	0.403	-60.5
2000	0.541	140.6	1.515	41.3	0.193	62.2	0.406	-66.5

$V_{CE}=5V, I_C=10mA, Z_0=50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.547	-70.6	17.652	139.1	0.027	64.1	0.801	-24.4
200	0.501	-112.1	12.156	117.0	0.040	55.5	0.610	-32.8
400	0.479	-148.5	6.937	97.2	0.056	55.7	0.457	-34.5
600	0.473	-166.7	4.783	85.8	0.071	60.0	0.398	-34.6
800	0.473	-178.8	3.677	77.6	0.088	63.2	0.374	-36.5
1000	0.478	172.1	3.005	70.5	0.107	65.0	0.366	-39.7
1200	0.486	163.7	2.570	63.7	0.126	65.6	0.358	-43.8
1400	0.492	156.4	2.228	57.3	0.147	65.8	0.353	-48.5
1600	0.502	149.2	1.967	51.4	0.166	65.5	0.349	-54.0
1800	0.514	142.4	1.765	45.9	0.188	64.6	0.348	-59.9
2000	0.526	135.6	1.626	42.1	0.209	63.6	0.351	-66.1

$V_{CE}=2V, I_C=3mA, Z_0=50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
100	0.788	-42.7	8.469	152.2	0.045	68.4	0.913	-17.6
200	0.714	-77.5	6.984	131.1	0.074	53.9	0.780	-29.2
400	0.626	-120.3	4.613	106.0	0.099	40.2	0.586	-38.9
600	0.587	-145.9	3.338	90.6	0.108	36.9	0.491	-42.9
800	0.577	-162.3	2.612	79.5	0.114	38.0	0.443	-46.0
1000	0.574	-174.9	2.173	70.6	0.122	40.9	0.422	-50.2
1200	0.577	174.5	1.872	62.2	0.131	44.2	0.410	-54.7
1400	0.578	165.4	1.637	54.5	0.142	47.9	0.400	-59.8
1600	0.587	157.0	1.447	47.5	0.155	51.1	0.398	-65.9
1800	0.598	149.0	1.303	41.6	0.173	53.7	0.398	-72.0
2000	0.608	141.3	1.203	36.3	0.194	55.6	0.403	-78.8

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any and all SANYO products described or contained herein fall under strategic products (including services) controlled under the Foreign Exchange and Foreign Trade Control Law of Japan, such products must not be exported without obtaining export license from the Ministry of International Trade and Industry in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of September, 1998. Specifications and information herein are subject to change without notice.