

ASSP Mobile Communication Systems

Piezoelectric SAW BPF (700 to 1000 MHz)

F5CE Series (D2 type)

■ DESCRIPTION


The F5CE-D2 series of SAW bandpass filters apply to the frequency range 700 to 1000 MHz. These filters make it possible to provide high stop-band attenuation and excellent pass-band flatness due to using unique DMS (Double Mode SAW) technology as design method. Moreover, these filters are provided in small 3.0 mm sq. package. This contributes to reduce weight and size of mobile communication units.

The F5CE-D2 series of SAW filters are suitable for interstage RF filter in mobile communication systems in the frequency range 700 to 1000 MHz. Standard devices are available for AMPS/CDMA/TDMA, GSM, PDC800 and ISM900.

■ FEATURES


- Excellent stop-band attenuation
- Low insertion loss and low pass-band ripple
- Ultra compact and light package (3.0 mm sq.)
- External matching circuits are not required. (50 Ω I/O)
- Surface mount package (SMT)
- Standard devices are available for mobile communication standards (AMPS/CDMA/TDMA, GSM, PDC800 and ISM900)

■ PACKAGE

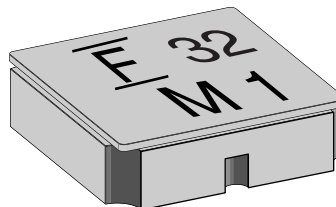

F5CE Series (D2 type)

■ PIN ASSIGNMENT

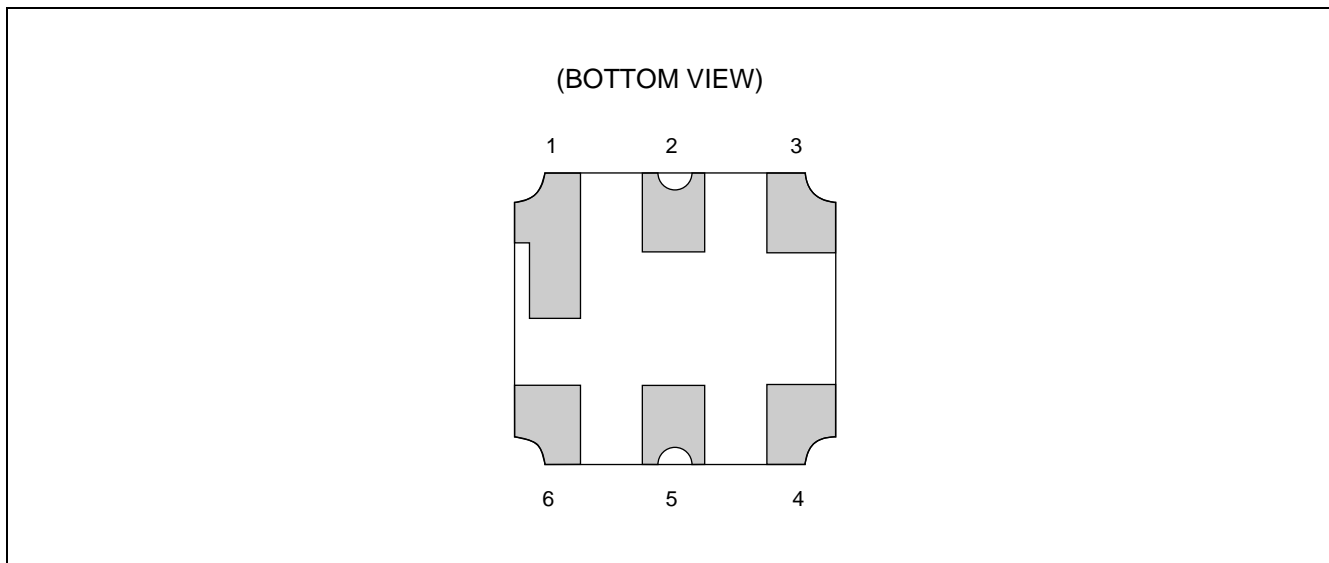

■ PIN DESCRIPTION

Pin no.	Pin name	Description
1	GND	Ground Pin
2	IN	Input Pin
3	GND	Ground Pin
4	GND	Ground Pin
5	OUT	Output Pin
6	GND	Ground Pin

■ ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Rating		Unit
		Min.	Max.	
Operating temperature	Ta	-30	+85	°C
Storage temperature	Tstg	-40	+100	°C
Input power	P _{IN}	—	+15	dBm
Input DC voltage	—	-5	+5	V

WARNING: Piezoelectric devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

F5CE Series (D2 type)

■ RECOMMENDED OPERATING CONDITION

Parameter	Symbol	Value		Unit
		Min.	Max.	
Operating temperature	Ta	-30	+85	°C

WARNING: The recommended operating conditions are required in order to ensure the normal operation of the piezoelectric device. All of the device's electrical characteristics are warranted when the device is operated within these ranges.

Always use piezoelectric devices within their recommended operating condition ranges. Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their FUJITSU representatives beforehand.

■ STANDARD DEVICES

System		Center frequency (MHz)	Band width (MHz)	Part symbol	Part number	Remarks
PDC800	Tx	950.0	20	30	FAR-F5CE-950M00-D230	
	Rx	820.0	20	31	FAR-F5CE-820M00-D231	
AMPS/CDMA/TDMA	Tx	836.5	25	32	FAR-F5CE-836M50-D232	
	Rx	881.5	25	33	FAR-F5CE-881M50-D233	
GSM	Tx	902.5	25	34	FAR-F5CE-902M50-D234	
	Rx	947.5	25	35	FAR-F5CE-947M50-D235	
EGSM	Tx	897.5	35	41	FAR-F5CE-897M50-D241	
	Rx	942.5	35	63	FAR-F5CE-942M50-D263	
ISM900	—	915.0	7	38	FAR-F5CE-915M00-D238	
	—	915.0	26	36	FAR-F5CE-915M00-D236	

F5CE Series (D2 type)


■ ELECTRICAL CHARACTERISTICS AND TYPICAL FREQUENCY RESPONSE

1. PDC800 (Tx)

Part number : FAR-F5CE-950M00-D230

(Ta = -30 °C to +85 °C)

Parameter	Conditions	Value			Unit	Remarks
		Min.	Typ.	Max.		
Insertion loss	940 to 960 MHz	—	2.6	3.0	dB	
Pass-band ripple	940 to 960 MHz	—	0.7	1.2	dB	
Absolute stop-band attenuation	DC to 680 MHz	50	66	—	dB	
	680 to 696 MHz	50	69	—	dB	
	810 to 830 MHz	50	66	—	dB	
	1015 to 1106 MHz	35	42	—	dB	
	1106 to 1700 MHz	50	59	—	dB	
Pass-band VSWR (Return loss)	940 to 960 MHz	—	1.8	2.0	—	
		(9.5)	(10.9)	—	(dB)	

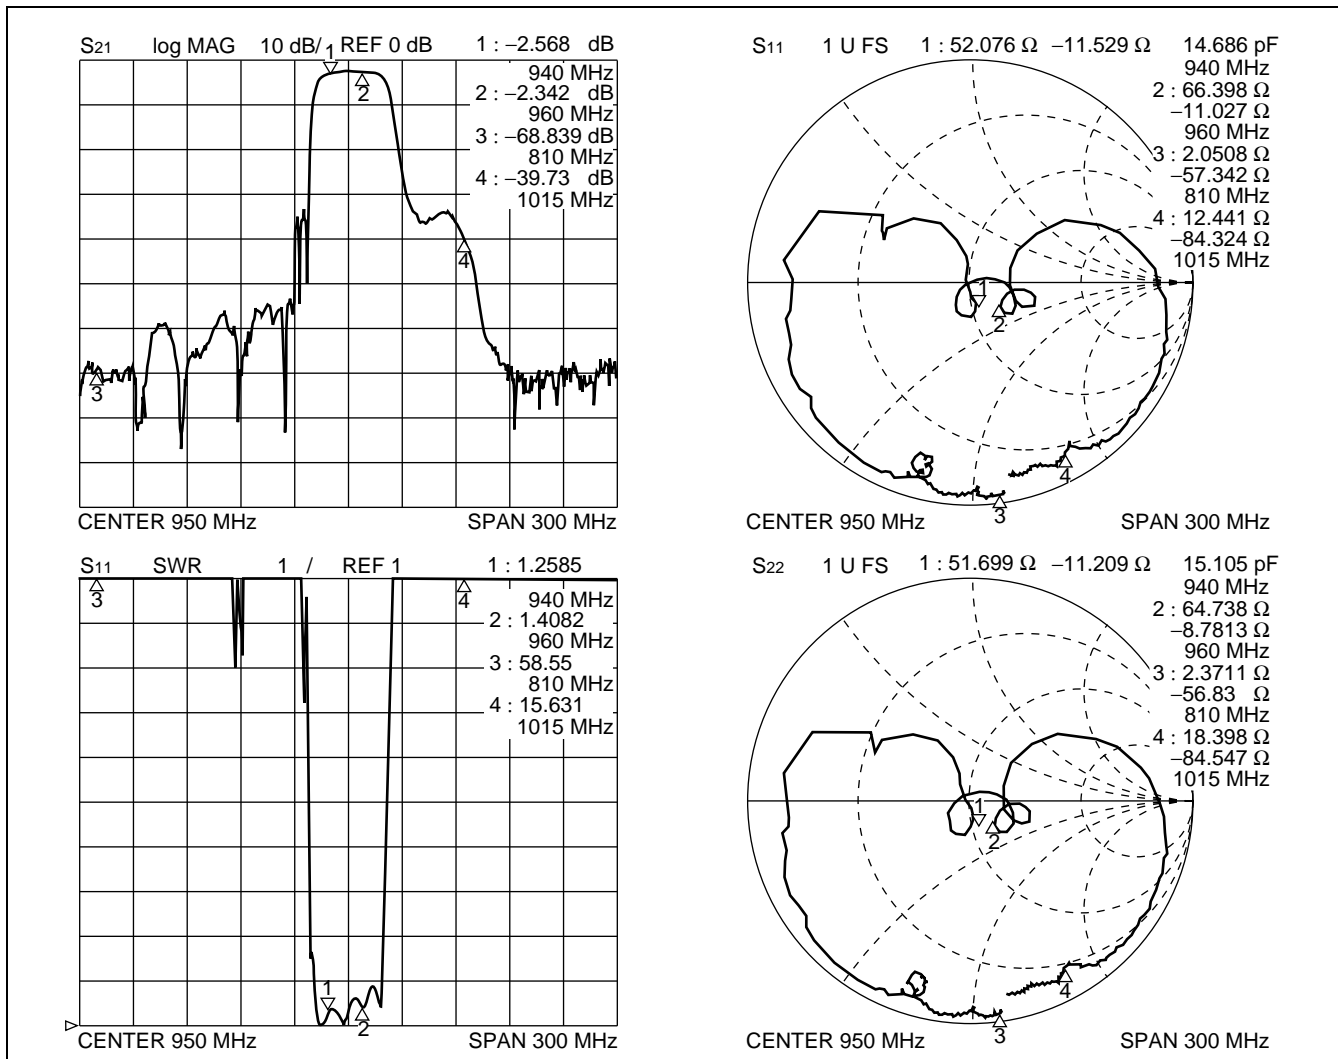





F5CE Series (D2 type)

2. PDC800 (Rx)

Part number : FAR-F5CE-820M00-D231

(Ta = -30 °C to +85 °C)

Parameter	Conditions	Value			Unit	Remarks
		Min.	Typ.	Max.		
Insertion loss	810 to 830 MHz	—	2.5	3.0	dB	
Pass-band ripple	810 to 830 MHz	—	0.7	1.2	dB	
Absolute stop-band attenuation	DC to 760 MHz	50	65	—	dB	
	855 to 875 MHz	28	30	—	dB	
	875 to 920 MHz	35	38	—	dB	
	920 to 1200 MHz	45	60	—	dB	
	1200 to 2000 MHz	40	47	—	dB	
Pass-band VSWR (Return loss)	810 to 830 MHz	— (9.5)	1.7 (11.7)	2.0 —	— (dB)	

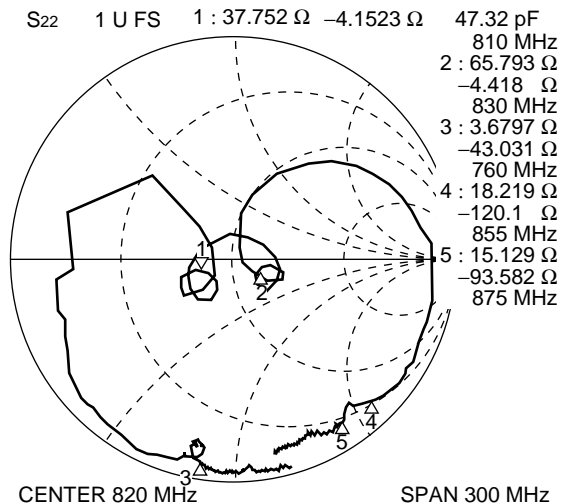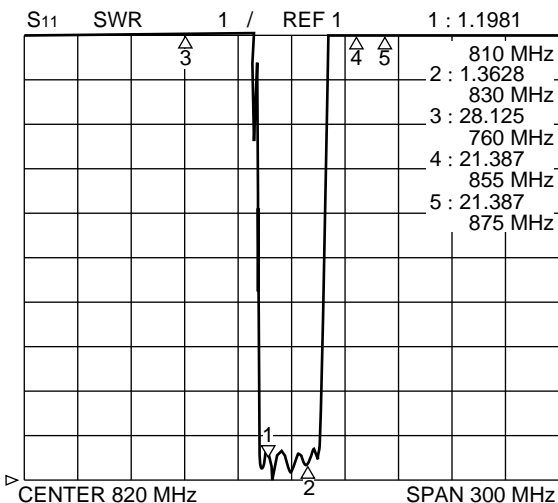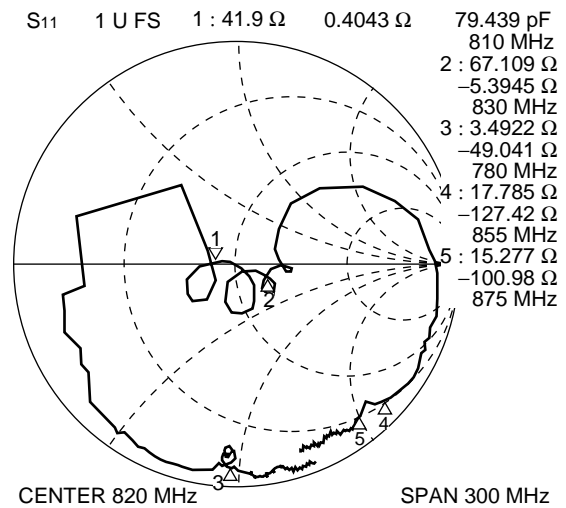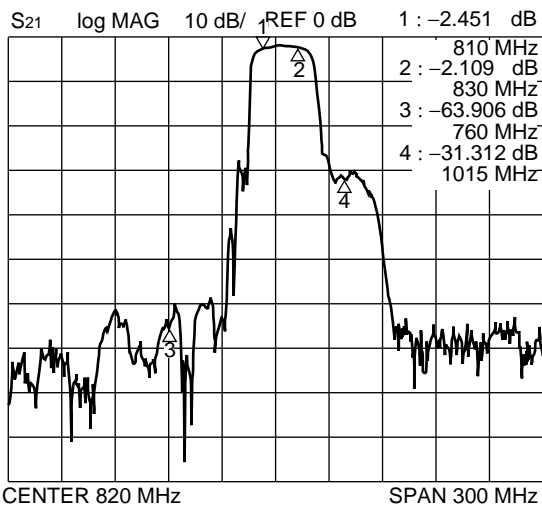


F5CE Series (D2 type)

3. AMPS/CDMA/TDMA (Tx)


Part number : FAR-F5CE-836M50-D232

(Ta = -30 °C to +85 °C)


Parameter	Conditions	Value			Unit	Remarks
		Min.	Typ.	Max.		
Insertion loss	824 to 849 MHz	—	2.7	3.5	dB	
Pass-band ripple	824 to 849 MHz	—	0.9	1.6	dB	
Absolute stop-band attenuation	DC to 800 MHz	50	66	—	dB	
	869 to 1049 MHz	28	33	—	dB	
	1049 to 1200 MHz	50	60	—	dB	
	1200 to 2000 MHz	45	50	—	dB	
Pass-band VSWR (Return loss)	824 to 849 MHz	— (9.5)	1.8 (10.9)	2.0 —	— (dB)	

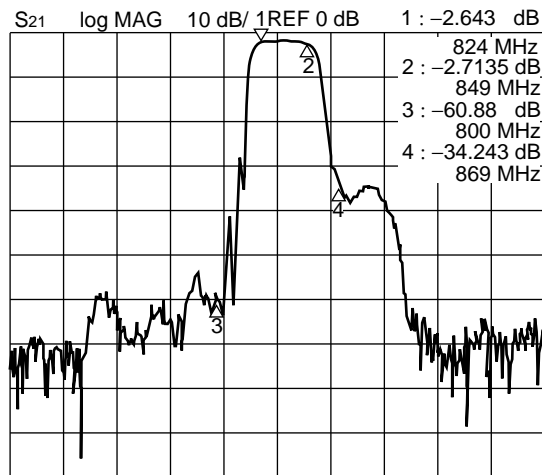


CENTER 835 MHz SPAN 300 MHz

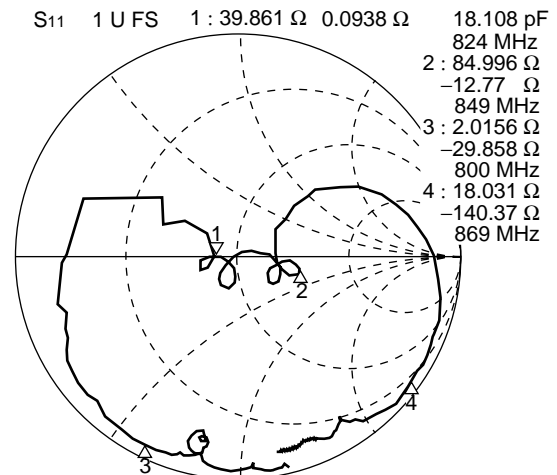

CENTER 835 MHz SPAN 300 MHz

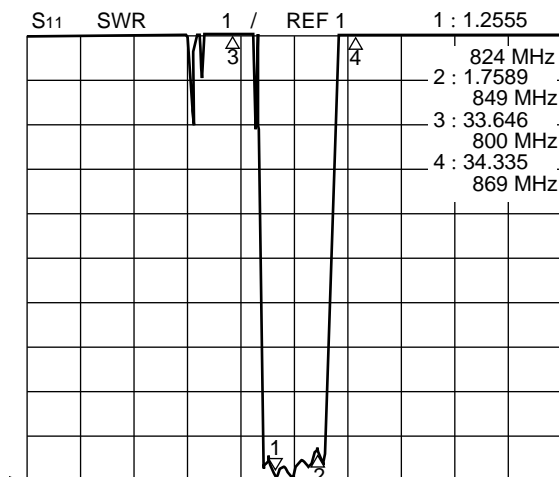

CENTER 835 MHz SPAN 300 MHz

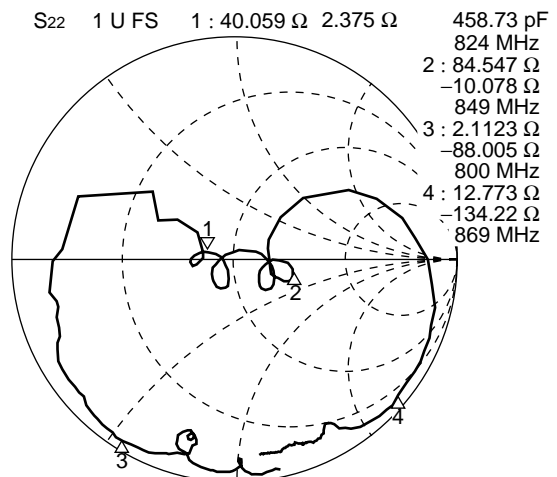

CENTER 835 MHz SPAN 300 MHz


F5CE Series (D2 type)

4. AMPS/CDMA/TDMA (Rx)


Part number : FAR-F5CE-881M50-D233

(Ta = -30 °C to +85 °C)


Parameter	Conditions	Value			Unit	Remarks
		Min.	Typ.	Max.		
Insertion loss	869 to 894 MHz	—	2.7	3.5	dB	
Pass-band ripple	869 to 894 MHz	—	0.9	1.6	dB	
Absolute stop-band attenuation	DC to 779 MHz	50	63	—	dB	
	779 to 849 MHz	45	50	—	dB	
	914 to 970 MHz	28	33	—	dB	
	970 to 1049 MHz	50	60	—	dB	
	1049 to 2000 MHz	40	50	—	dB	
Pass-band VSWR (Return loss)	869 to 894 MHz	— (9.5)	1.7 (11.7)	2.0 —	— (dB)	

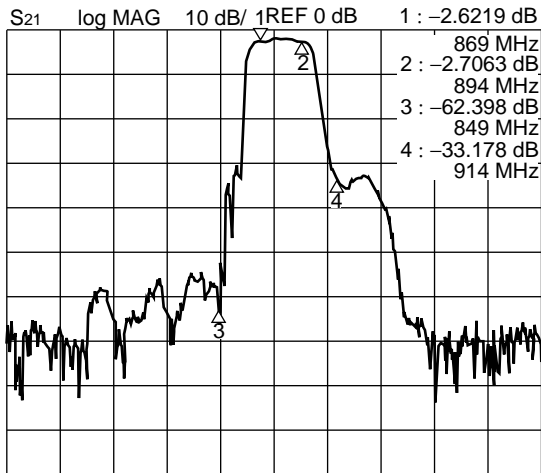


CENTER 880 MHz SPAN 300 MHz

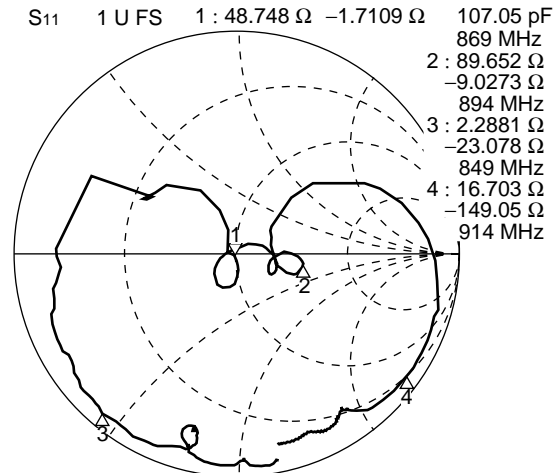

CENTER 880 MHz SPAN 300 MHz

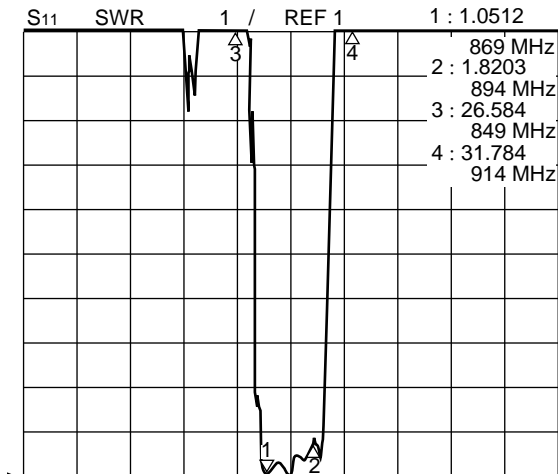

CENTER 880 MHz SPAN 300 MHz

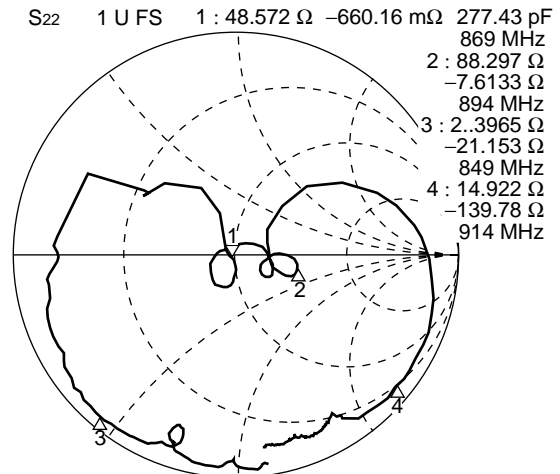

CENTER 880 MHz SPAN 300 MHz


F5CE Series (D2 type)

5. GSM (Tx)


Part number : FAR-F5CE-902M50-D234

(Ta = -30 °C to +85 °C)


Parameter	Conditions	Value			Unit	Remarks
		Min.	Typ.	Max.		
Insertion loss	890 to 915 MHz	—	2.8	3.3	dB	
Pass-band ripple	890 to 915 MHz	—	0.8	1.4	dB	
Absolute stop-band attenuation	DC to 845 MHz	50	60	—	dB	
	845 to 870 MHz	45	50	—	dB	
	925 to 935 MHz	5	18	—	dB	
	935 to 980 MHz	28	33	—	dB	
	980 to 1200 MHz	50	60	—	dB	
Pass-band VSWR (Return loss)	890 to 915 MHz	—	1.7	2.1	—	
		(9.0)	(11.7)	—	(dB)	

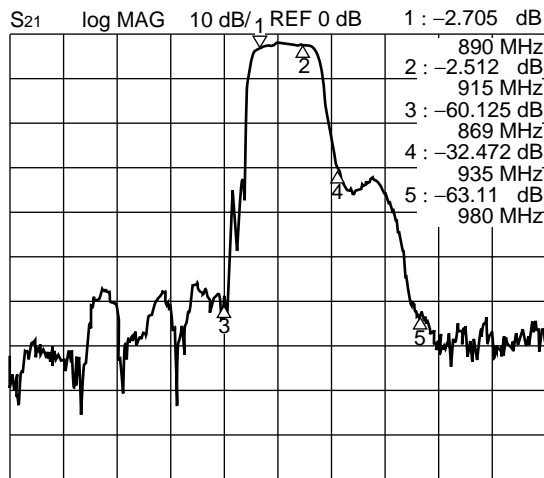


CENTER 900 MHz SPAN 300 MHz

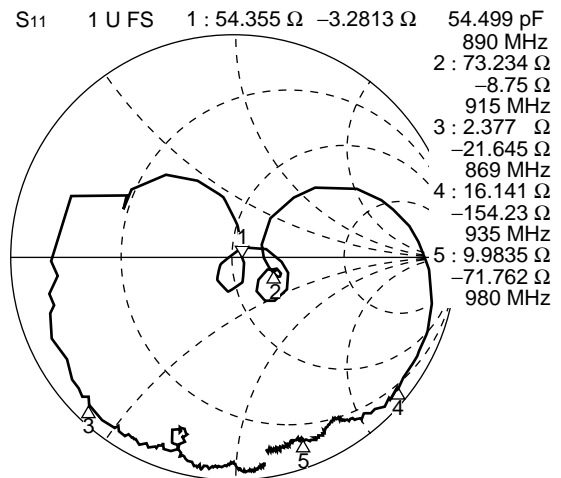

CENTER 900 MHz SPAN 300 MHz

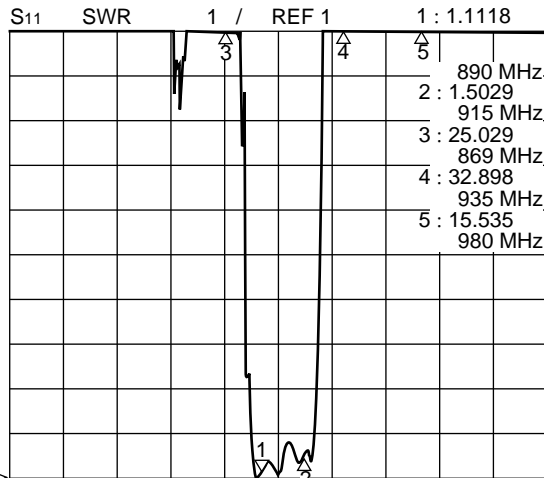

CENTER 900 MHz SPAN 300 MHz

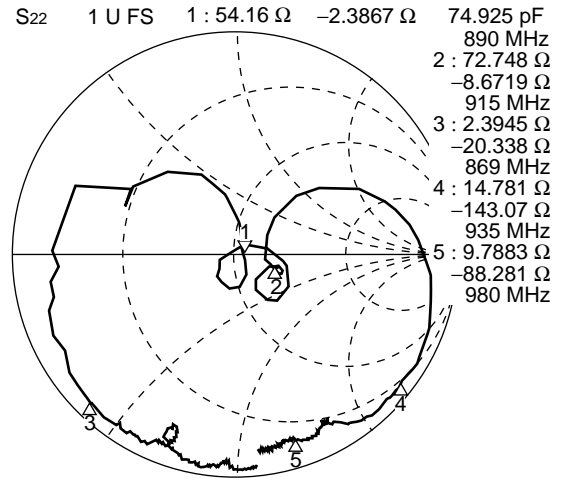

CENTER 900 MHz SPAN 300 MHz


F5CE Series (D2 type)

6. GSM (Rx)


Part number : FAR-F5CE-947M50-D235

(Ta = -30 °C to +85 °C)


Parameter	Conditions	Value			Unit	Remarks
		Min.	Typ.	Max.		
Insertion loss	935 to 960 MHz	—	2.7	3.3	dB	
Pass-band ripple	935 to 960 MHz	—	0.7	1.4	dB	
Absolute stop-band attenuation	DC to 871 MHz	50	66	—	dB	
	890 to 915 MHz	30	40	—	dB	
	980 to 1025 MHz	25	34	—	dB	
	1025 to 2000 MHz	45	48	—	dB	
	2000 to 3000 MHz	30	33	—	dB	
Pass-band VSWR (Return loss)	935 to 960 MHz	— (9.0)	1.9 (10.2)	2.1 —	— (dB)	

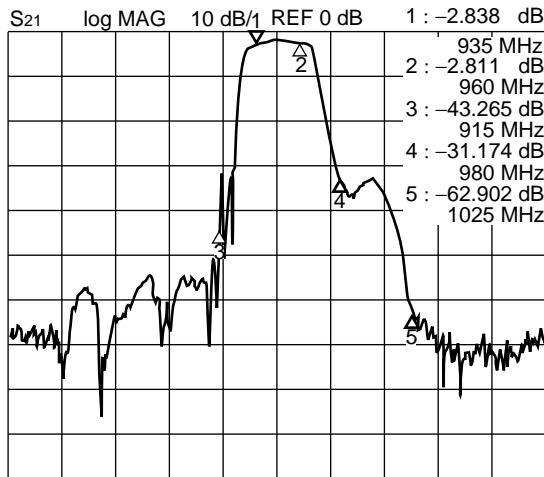


CENTER 950 MHz SPAN 300 MHz

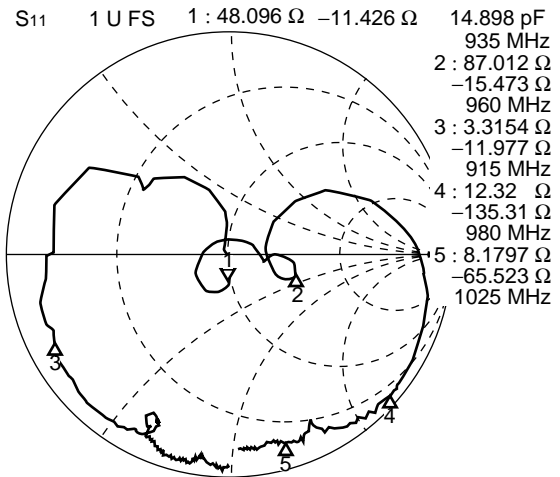

CENTER 950 MHz SPAN 300 MHz

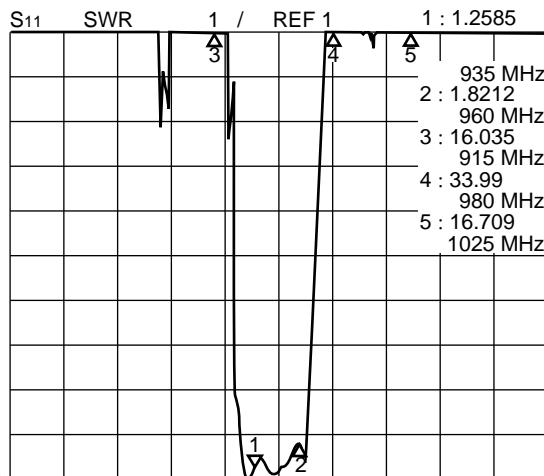

CENTER 950 MHz SPAN 300 MHz

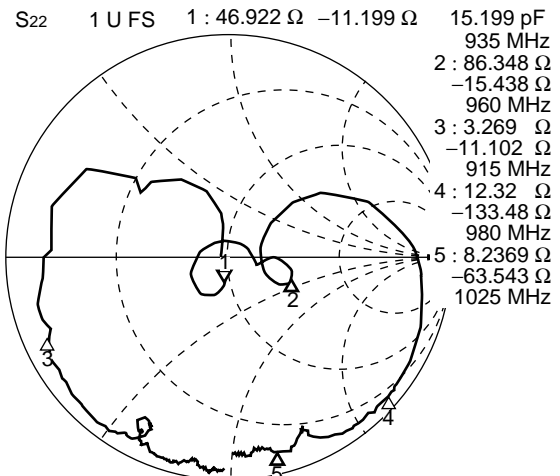

CENTER 950 MHz SPAN 300 MHz


F5CE Series (D2 type)

7. EGSM (Tx)

Part number : FAR-F5CE-897M50-D241

(Ta = -30 °C to +85 °C)

Parameter	Conditions	Value			Unit	Remarks
		Min.	Typ.	Max.		
Insertion loss	880 to 915 MHz	—	3.6	4.5	dB	
Pass-band ripple	880 to 915 MHz	—	1.8	2.7	dB	
Absolute stop-band attenuation	DC to 845 MHz	50	55	—	dB	
	925 to 980 MHz	10	14	—	dB	
	980 to 1200 MHz	40	54	—	dB	
	1200 to 2100 MHz	35	50	—	dB	
Pass-band VSWR (Return loss)	880 to 915 MHz	—	2.7	3.2	—	
		(5.6)	(6.8)	—	(dB)	

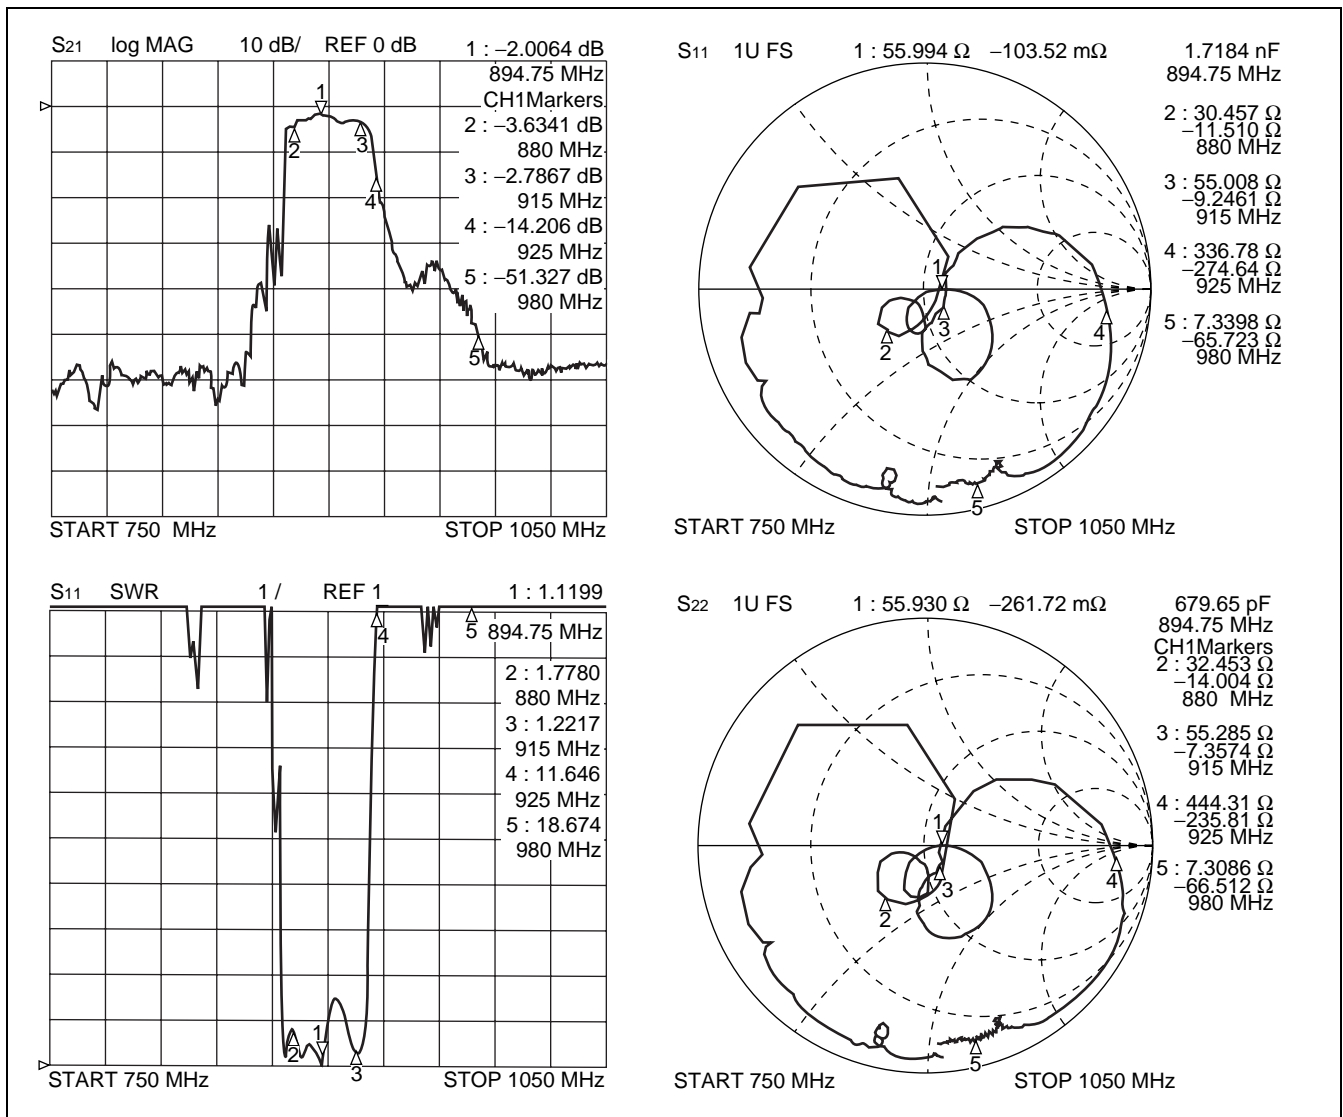


F5CE Series (D2 type)

8. EGSM (Rx)

Part number : FAR-F5CE-942M50-D263

(Ta = -30 °C to +85 °C)

Parameter	Conditions	Value			Unit	Remarks
		Min.	Typ.	Max.		
Insertion loss	925 to 960 MHz	—	3.1	4.2	dB	Ta = -30 °C to +85 °C
		—	3.1	3.5		Ta = +15 °C to +35 °C
Pass-band ripple	925 to 960 MHz	—	1.2	2.0	dB	
Absolute stop-band attenuation	DC to 871 MHz	50	62	—	dB	
	890 to 915 MHz	15	23	—	dB	
	980 to 1025 MHz	23	32	—	dB	
	1025 to 2000 MHz	40	45	—	dB	
Pass-band VSWR (Return loss)	925 to 960 MHz	—	1.7	3.0	— (dB)	
		(6.0)	(11.7)	—		

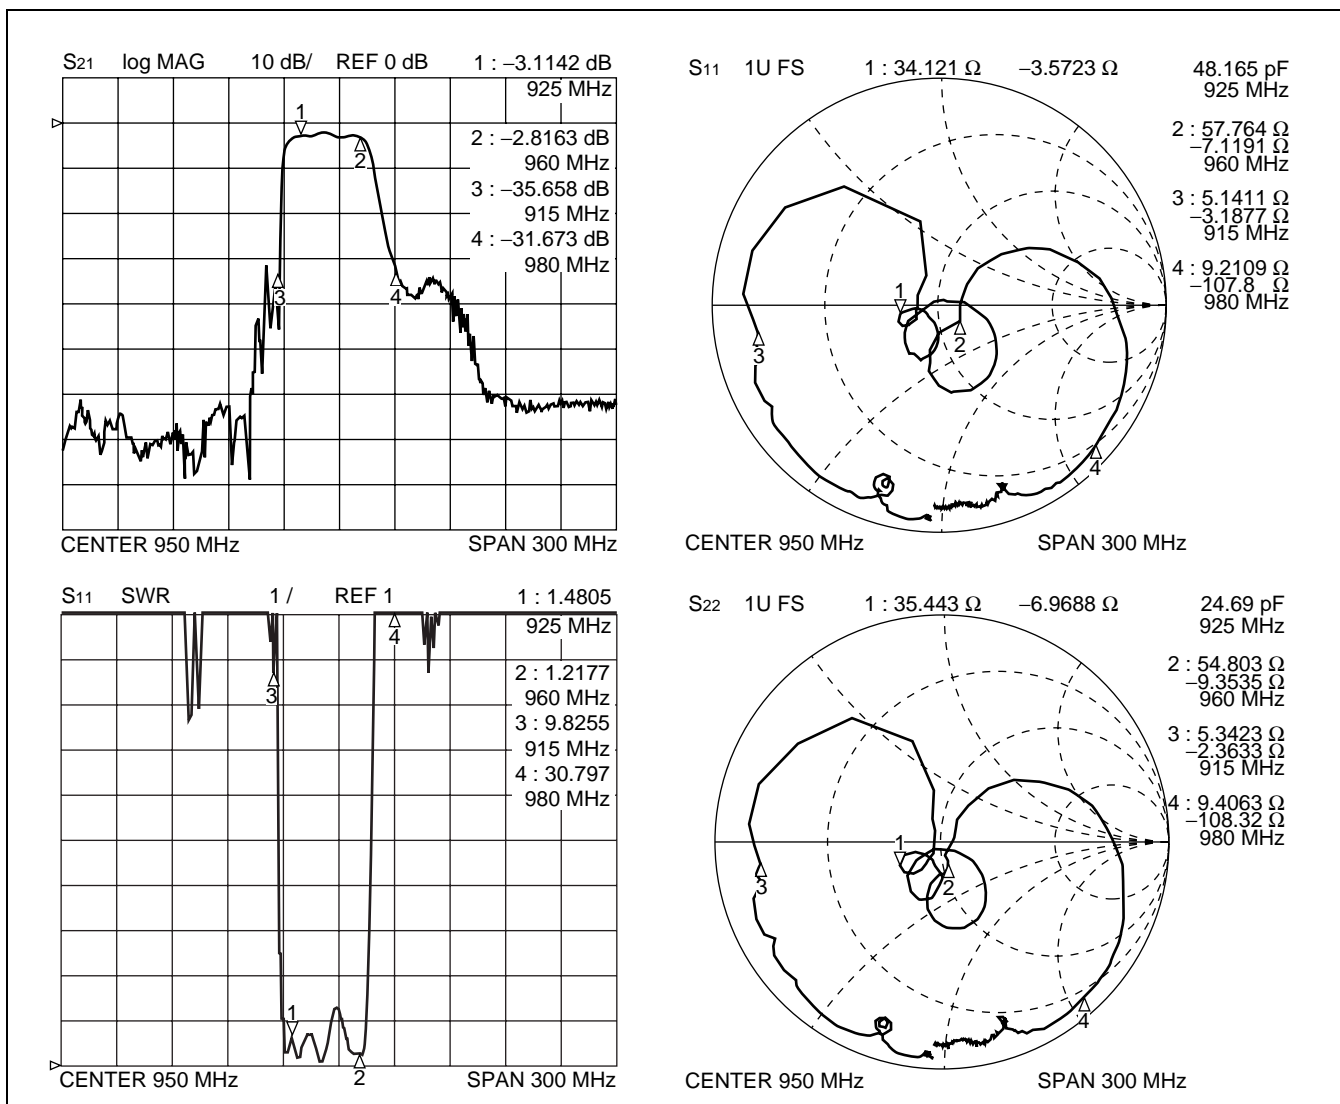


F5CE Series (D2 type)

9. ISM900 (7 MHz Bandwidth) Part number : FAR-F5CE-915M00-D238

(Ta = -30 °C to +85 °C)

Parameter	Conditions	Value			Unit	Remarks
		Min.	Typ.	Max.		
Insertion loss	911.5 to 918.5 MHz	—	3.2	3.5	dB	
Pass-band ripple	911.5 to 918.5 MHz	—	0.3	1.0	dB	
Absolute stop-band attenuation	DC to 600 MHz	50	66	—	dB	
	600 to 840 MHz	40	35	—	dB	
	869 to 894 MHz	35	40	—	dB	
	970 to 1500 MHz	40	45	—	dB	
	1500 to 3000 MHz	25	28	—	dB	
Pass-band VSWR (Return loss)	911.5 to 918.5 MHz	— (9.5)	1.8 (10.9)	2.0 —	— (dB)	

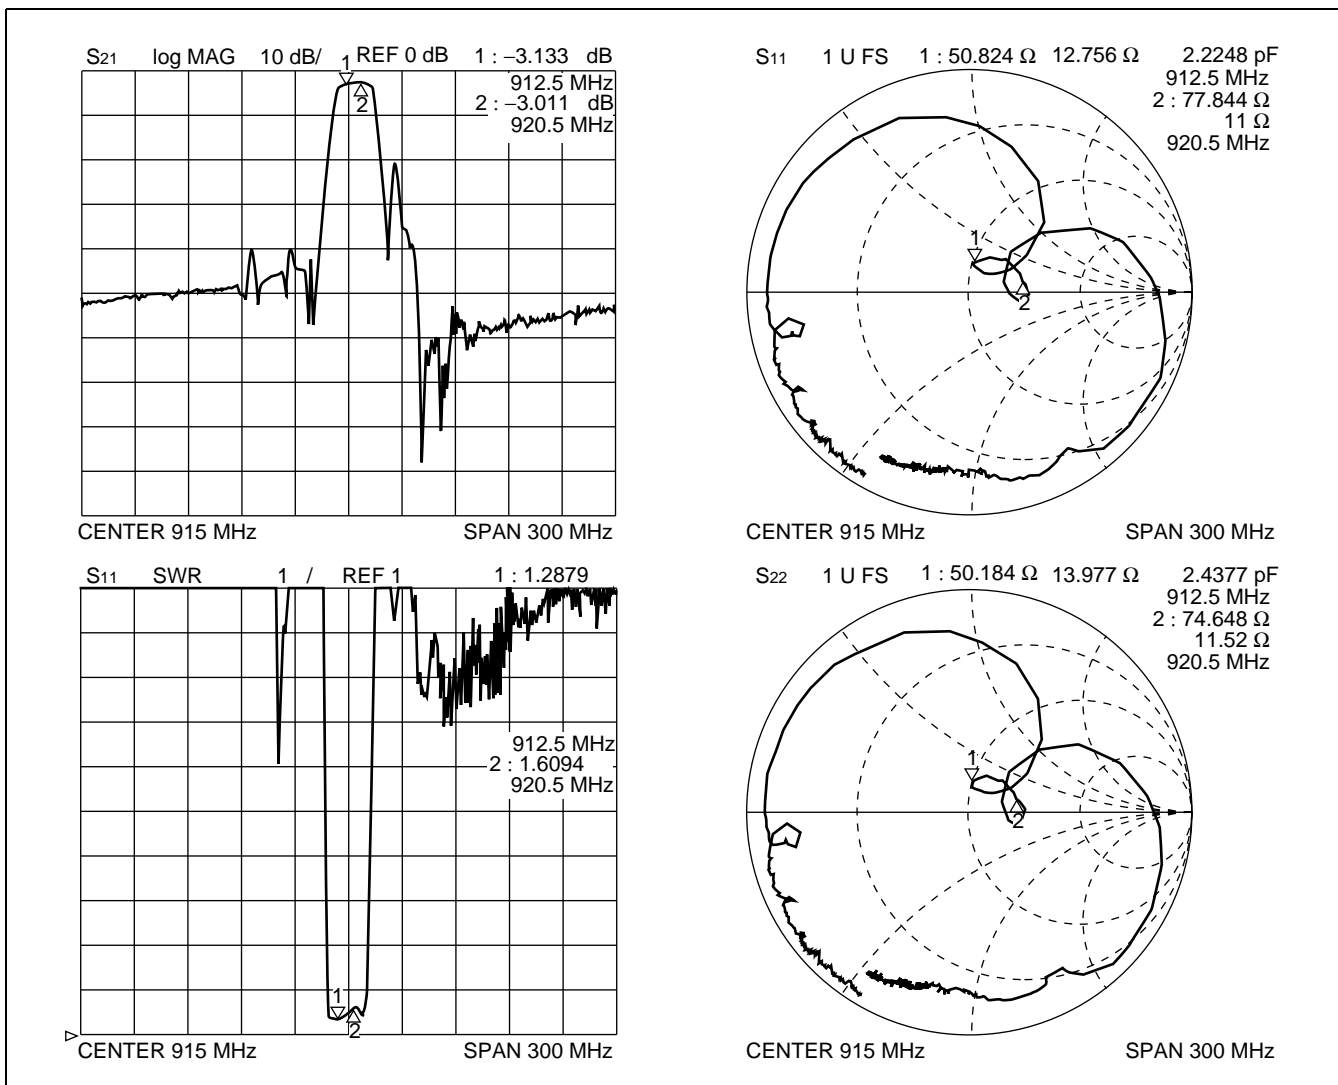


F5CE Series (D2 type)

10. ISM900 (26 MHz Bandwidth)

Part number : FAR-F5CE-915M00-D236


(Ta = -30 °C to +85 °C)

Parameter	Conditions	Value			Unit	Remarks
		Min.	Typ.	Max.		
Insertion loss	902 to 928 MHz	—	2.6	3.5	dB	
Pass-band ripple	902 to 928 MHz	—	0.9	2.0	dB	
Absolute stop-band attenuation	DC to 800 MHz	50	70	—	dB	
	800 to 880 MHz	45	57	—	dB	
	950 to 1080 MHz	28	31	—	dB	
	1080 to 2000 MHz	45	60	—	dB	
Pass-band VSWR (Return loss)	902 to 928 MHz	—	1.7	2.3	—	
		(8.1)	(11.7)	—	(dB)	

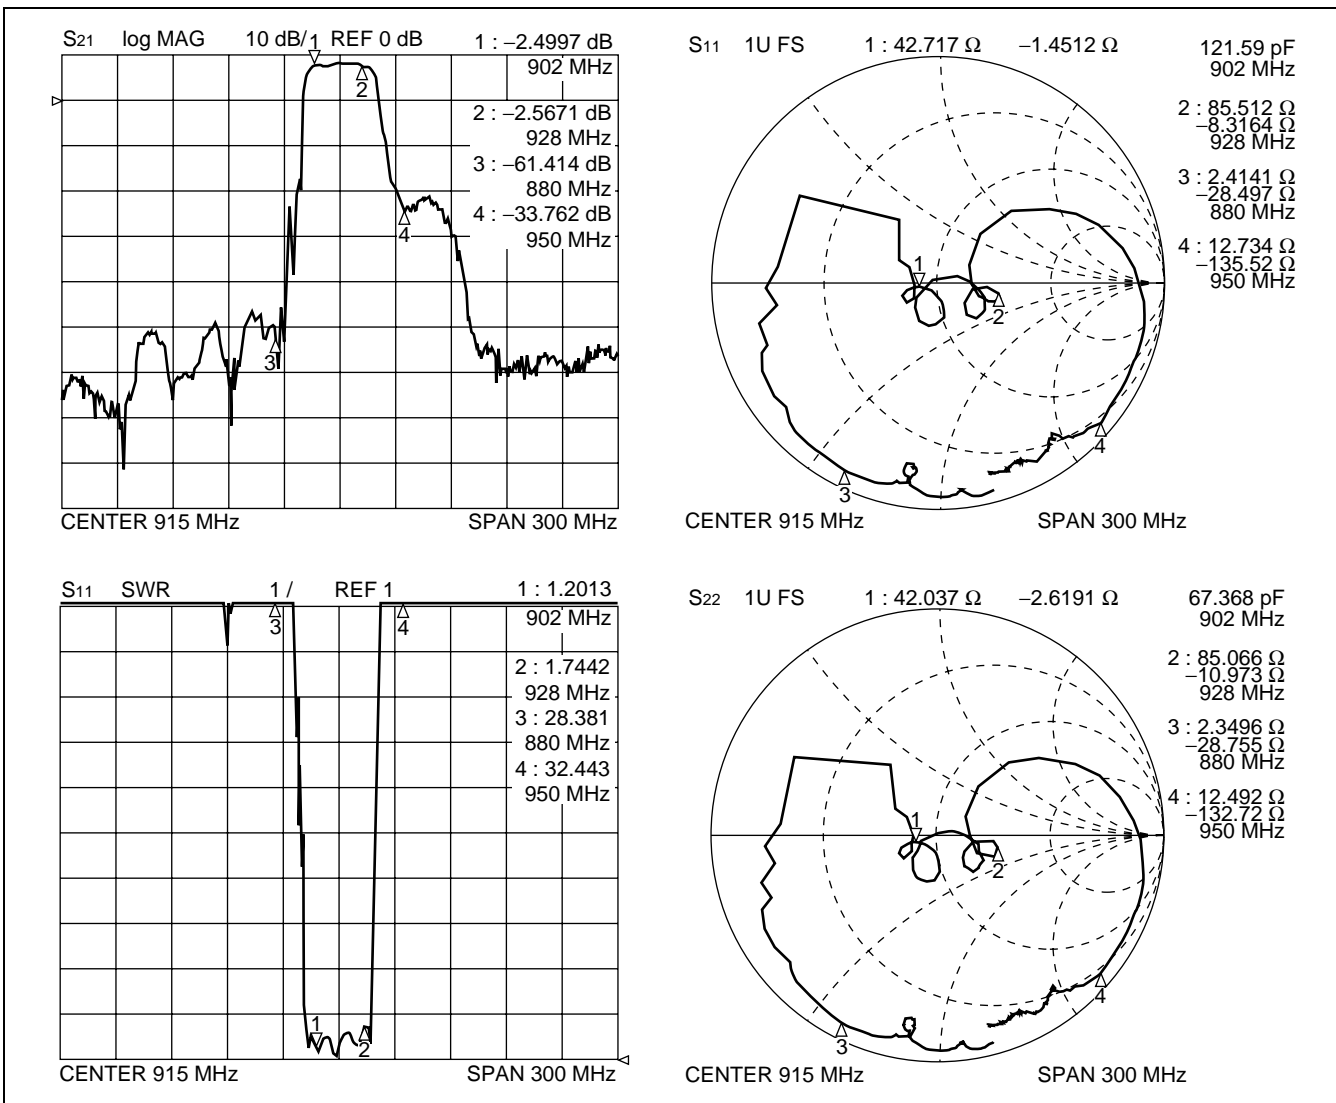

F5CE Series (D2 type)

MEASURING CIRCUIT

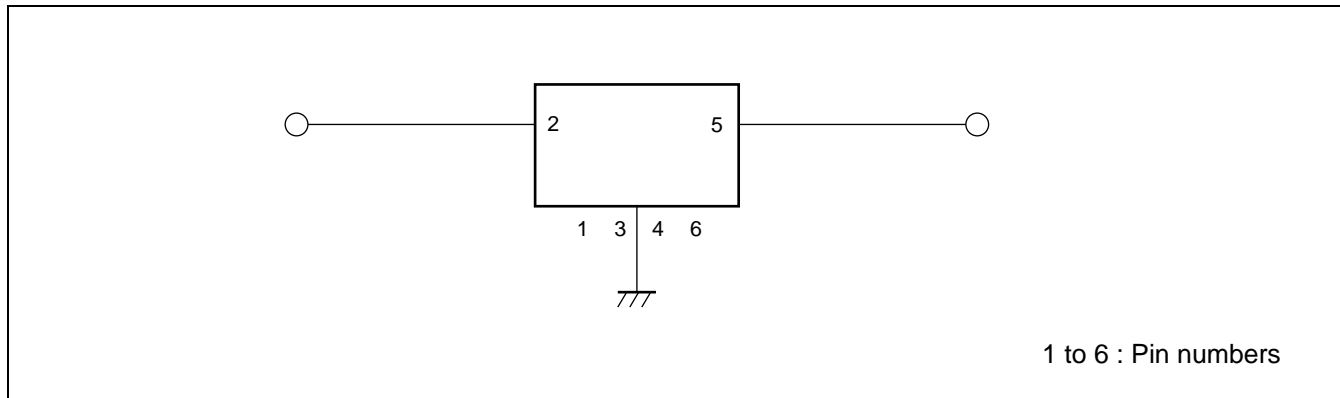


PART NUMBER DESIGNATION

[Designation example]

FAR-F5CE-□□□M□□-D2□□-□
(1) (2) (3)


- (1) Frequency designation : Specify the nominal frequency in six alphanumeric characters.
Enter M (for MHz) at the decimal point.
Refer to "■STANDARD DEVICES".
[Example] 836.5 MHz → 836M50
- (2) Serial number : Specify a characters from 01 to 99.
Refer to "■STANDARD DEVICES".
- (3) Packing (Reeled tape) : Y : 1 k pcs/reel
X : 5 k pcs/reel

MARKING

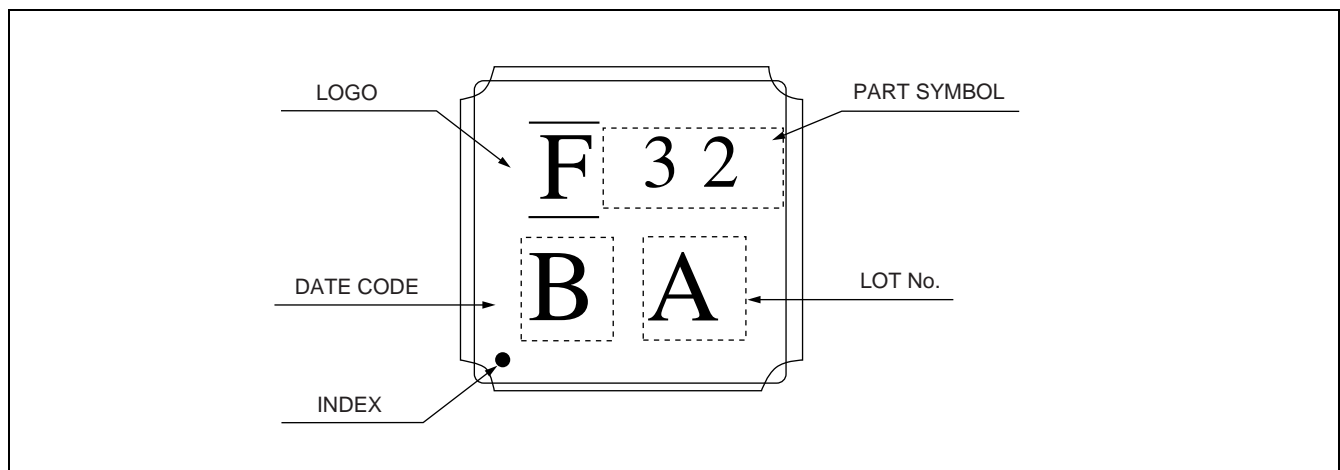

F5CE Series (D2 type)


■ PACKAGE DIMENSION

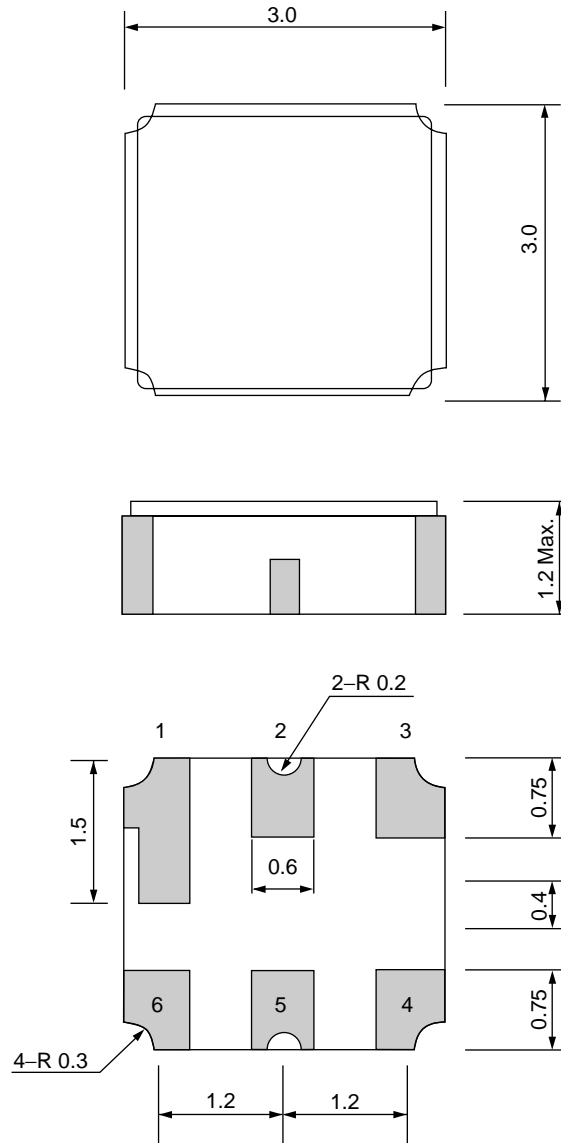

Dimensions in mm.

F5CE Series (D2 type)

RECOMMENDED LAND PATTERN

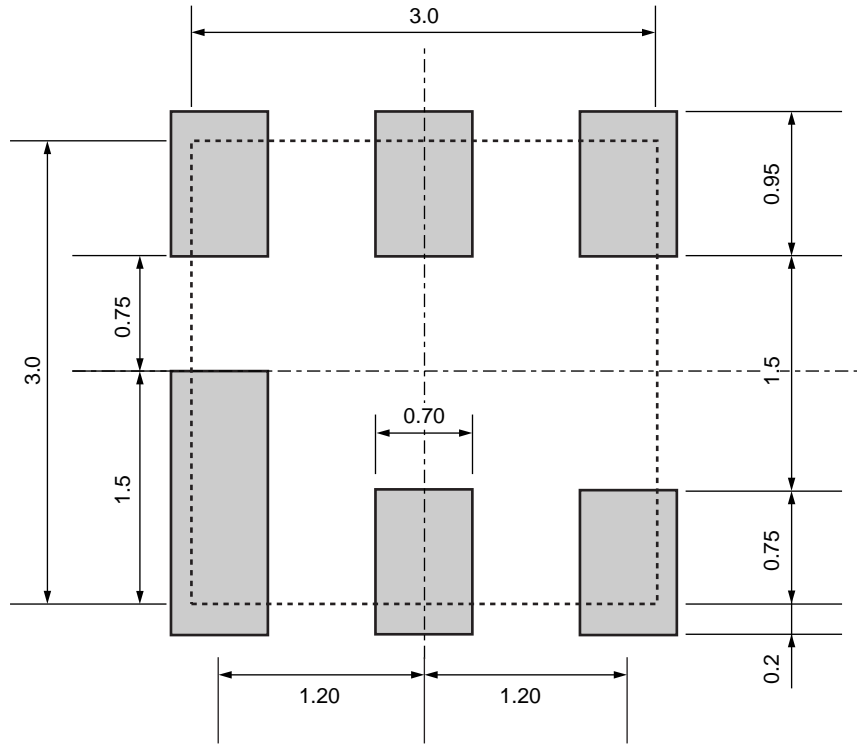


Dimensions in mm.


F5CE Series (D2 type)

■ PACKING

1. Reel Dimensions

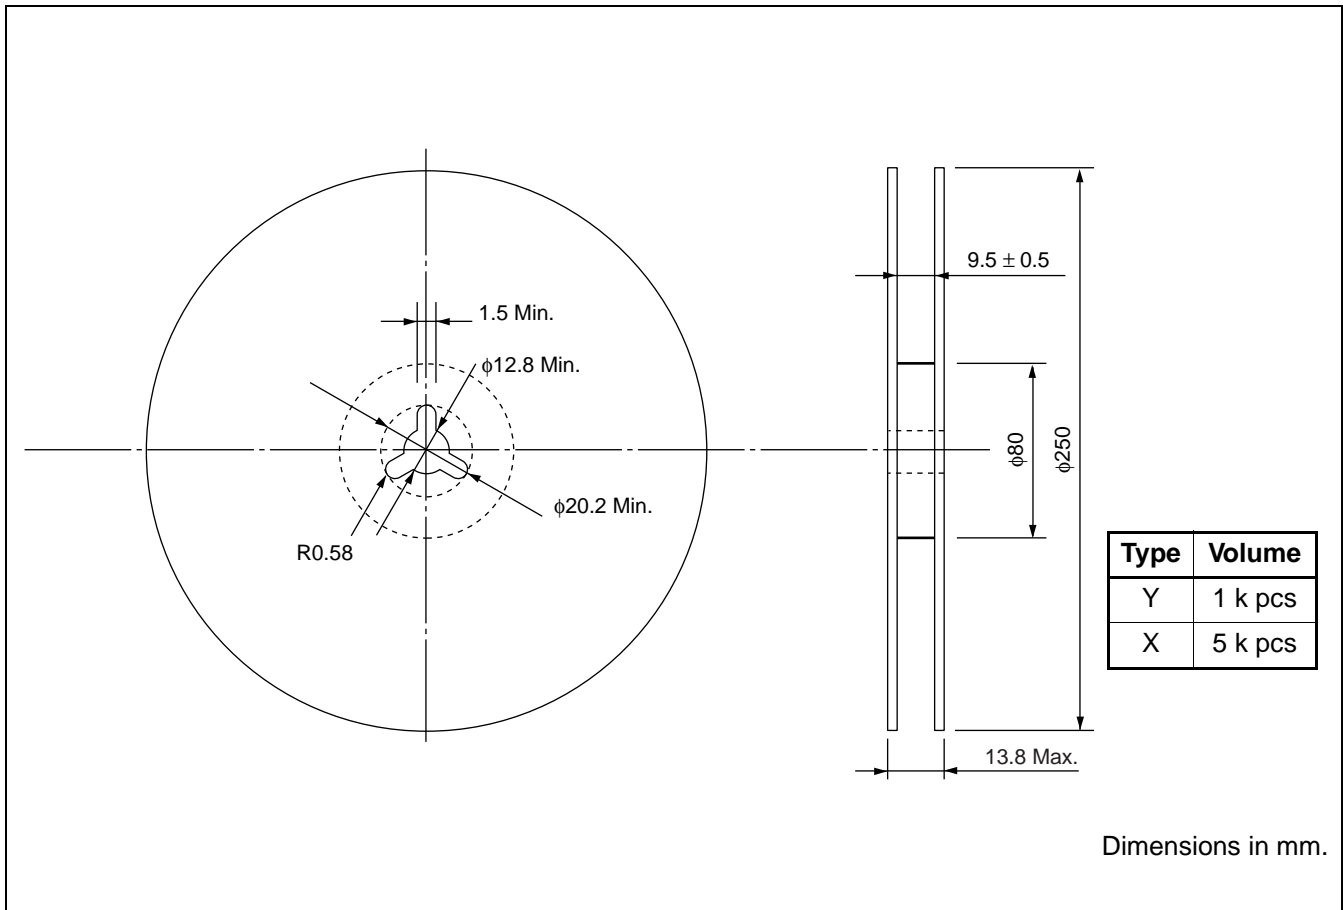


2. Packing Style

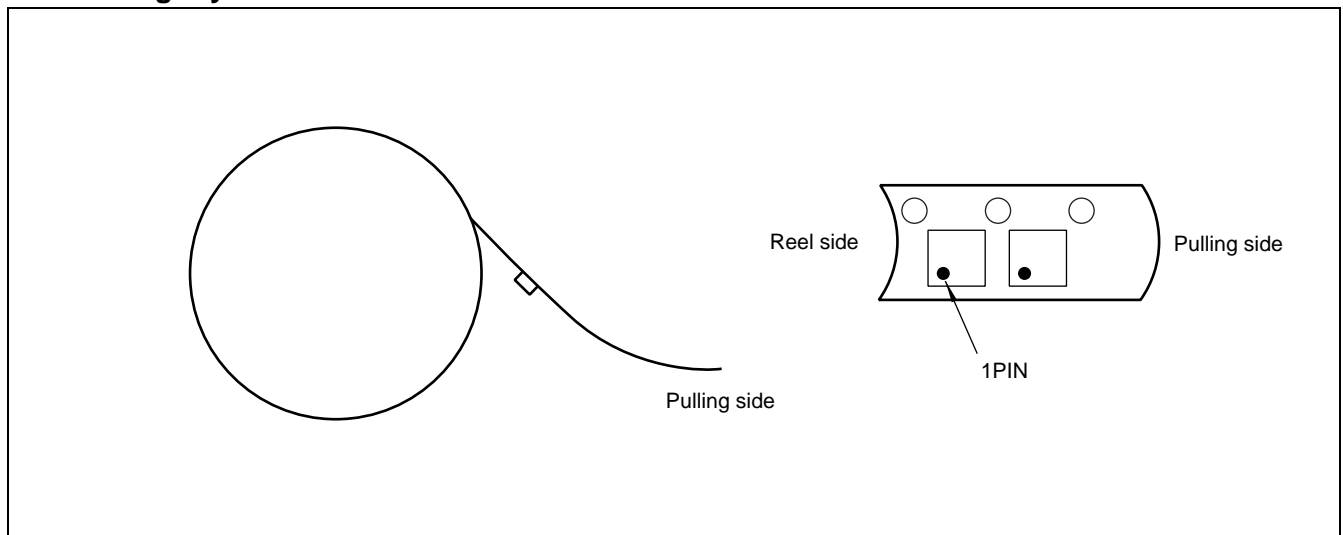

F5CE Series (D2 type)


3. Tape Dimensions

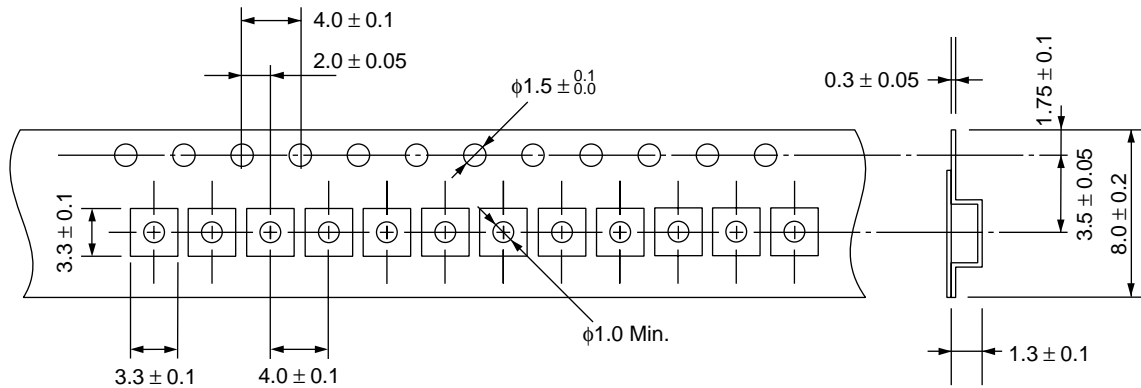

Dimensions in mm.


4. Peel strength of top cover tape

Peel off by the force of 0.1 N to 1.0 N under the condition at the right.
(Conforms to EIA)

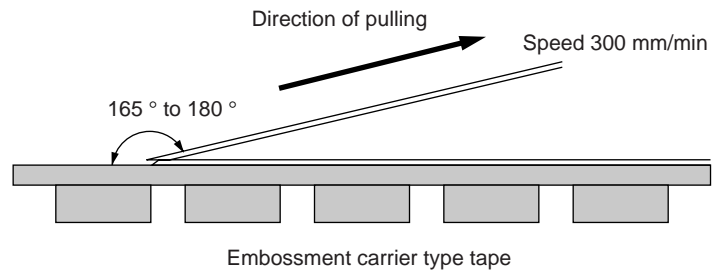

F5CE Series (D2 type)

RECOMMENDED REFLOW PROFILE

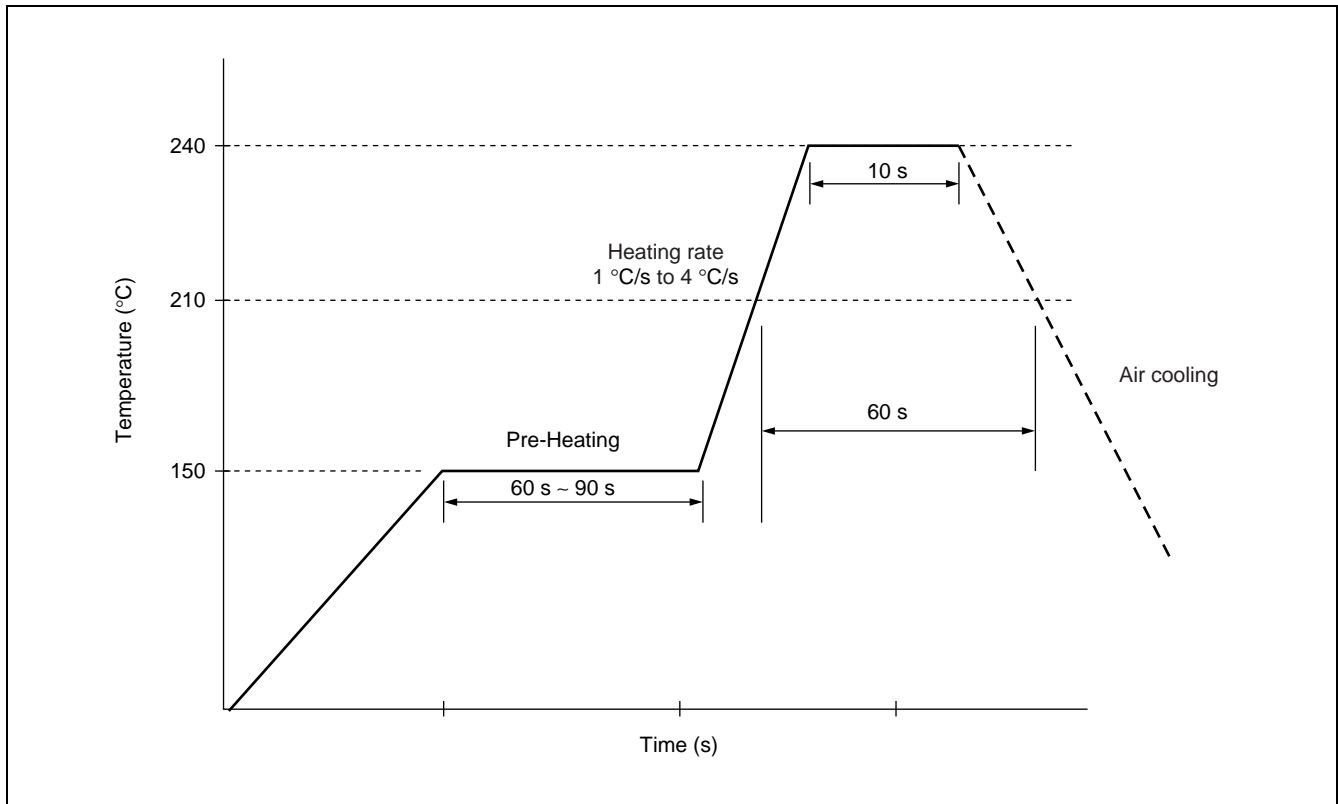

NOTE

A mass-produced product order is accepted by a unit of 1000.

F5CE Series (D2 type)

FUJITSU MEDIA DEVICES LIMITED

For further information please contact:

Japan

FUJITSU MEDIA DEVICE LIMITED
International Sales & Marketing DEPT.
Shin-Yokohama Square Bldg., 14F,
Shin-yokohama 2-3-12,
Kohoku-ku, Yokohama,
Kanagawa 222-0033, Japan
Tel: +81-45-471-0061
Fax: +81-45-471-0076

<http://edevice.fujitsu.com/fmd/>

North and South America

FUJITSU MEDIA DEVICES OF AMERICA, INC.
1731 Technology Drive, Suite 800,
San Jose, CA 95110 U.S.A.
Tel: (1)-408-437-8900
Fax: (1)-408-437-0700

<http://www.fujitsumedia.com/>

Europe

FUJITSU MICROELECTRONICS EUROPE GmbH
Am Siebenstein 6-10,
D-63303 Dreieich-Buchsschlag,
Germany
Tel: +49-6103-690-0
Fax: +49-6103-690-122

<http://www.fujitsu-fme.com/>

Asia Pacific

FUJITSU MICROELECTRONICS ASIA PTE. LTD.
#05-08, 151 Lorong Chuan,
New Tech Park,
Singapore 556741
Tel: +65-281-0770
Fax: +65-281-0220

<http://www.fmal.fujitsu.com/>

F0107

© FUJITSU LIMITED Printed in Japan

All Rights Reserved.

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU MEDIA DEVICES sales representatives before ordering.

The information and circuit diagrams in this document are presented as examples of device applications, and are not intended to be incorporated in devices for actual use. Also, FUJITSU MEDIA DEVICES is unable to assume responsibility for infringement of any patent rights or other rights of third parties arising from the use of this information or circuit diagrams.

The products described in this document are designed, and manufactured as contemplated for general use, including without limitation, ordinary industrial use, general office use, personal use, and household use, but are not designed, developed and manufactured as contemplated (1) for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could have a serious effect to the public, and could lead directly to death, personal injury, severe physical damage or other loss (i.e., nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system), or (2) for use requiring extremely high reliability (i.e., submersible repeater and artificial satellite).

Please note that Fujitsu will not be liable against you and/or any third party for any claims or damages arising in connection with above-mentioned uses of the products.

Any electronic devices have inherently a certain rate of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Control Law of Japan, the prior authorization by Japanese government should be required for export of those products from Japan.